

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
9 June 2005 (09.06.2005)

PCT

(10) International Publication Number
WO 2005/053039 A2

(51) International Patent Classification⁷: **H01L 31/042**,
31/05, 31/048

(21) International Application Number:
PCT/JP2004/017985

(22) International Filing Date:
26 November 2004 (26.11.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2003-398197 27 November 2003 (27.11.2003) JP
2003-431603 25 December 2003 (25.12.2003) JP
2004-096815 29 March 2004 (29.03.2004) JP

(71) Applicant (for all designated States except US): **KYOCERA CORPORATION** [JP/JP]; 6, Takeda To-
badono-cho, Fushimi-ku, Kyoto-shi, Kyoto 6128501 (JP).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **FUJII, Shuichi**


[JP/JP]; c/o KYOCERA CORPORATION, 1166-6 Na-
gatanino, Hebimizo-cho, Yokaichi-shi, Shiga 5278555
(JP). **KANEKO, Toshihiko** [JP/JP]; c/o KYOCERA
CORPORATION, 1166-6 Nagatanino, Hebimizo-cho,
Yokaichi-shi, Shiga 5278555 (JP). **TSUGE, Takashi**
[JP/JP]; c/o KYOCERA CORPORATION, 600-10, Shi-
mono-cho, Ise-shi, Mie 5160003 (JP). **SHIRASAWA,**
Katsuhiko [JP/JP]; c/o KYOCERA CORPORATION,
1166-6 Nagatanino, Hebimizo-cho, Yokaichi-shi, Shiga
5278555 (JP).

(74) Agents: **INAOKA, Kosaku** et al.; c/o AI ASSOCIATION
OF PATENT AND TRADEMARK ATTORNEYS, Sun
Mullion NBF Tower, 21st Floor, 6-12, Minamihommachi
2-chome, Chuo-ku, Osaka-shi, Osaka 5410054 (JP).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG,
KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG,
MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH,

[Continued on next page]

(54) Title: SOLAR CELL MODULE

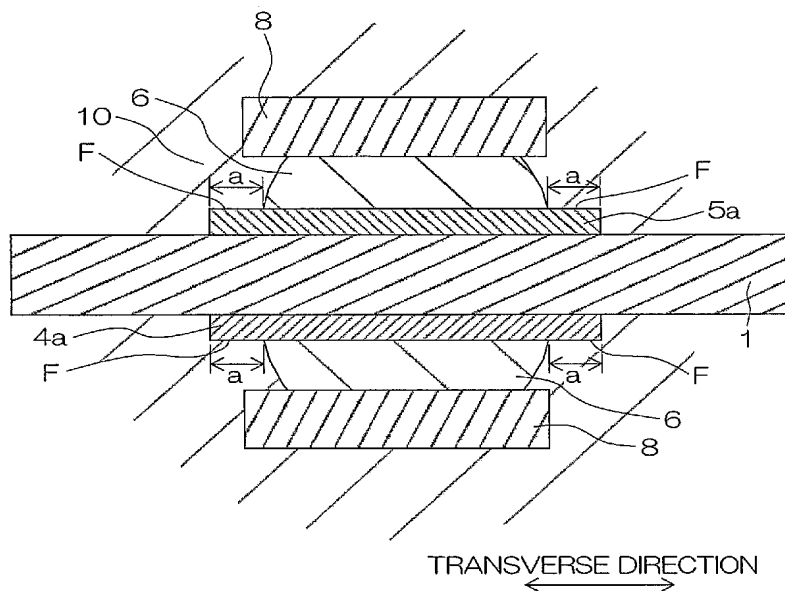

(57) Abstract: The largest stress is created in the vicinity of the boundary between an edge of a bus bar electrode in a solar cell and a surface of a semiconductor substrate, and stresses are easily concentrated. Accordingly, defects such as micro cracks occur in the semiconductor substrate, which develop into a large craze with the defects as its starting point. In connecting bus bar electrodes 4a and 5a in the solar cell by an inner lead 8, therefore, a solder 6 is not brought into contact with edges along the longitudinal direction of the bus bar electrodes 4a and 5a and portions F from the edges to a predetermined distance a inward therefrom, and is brought into direct contact with a filler 10.

WO 2005/053039 A2



PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LU, MC, NL, PL, PT, RO, SE,

Published:

— *without international search report and to be republished upon receipt of that report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.